

TEST REPORT

for

PINA S.A.

Carretera de Teruel km 98
Fuentes – CUENCA, Spain 16193
Jose Luis Pineda / 34 926 569 710

Sound Transmission Loss Test

ASTM E 90 – 09 (2016) / E 413 – 16

On

**6 Inch (152 mm) Concrete Slab Floor- Ceiling Assembly
Overlaid with 8 mm Laminate Flooring and DMX 1-Step 2.0 Underlayment
With a Suspended-Gypsum Board Ceiling
With 3-1/2 Inch Fiberglass Insulation**

Report Number: NGC 5020013

Assignment Number: G-1668

Test Date: 01/21/2020

Report Date: 02/03/2020

Submitted by:


Anthony J. Rivers
Test Technician

Reviewed by:


Robert J. Menchetti
Director

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Revision Summary:

Date	SUMMARY
Approval Date: 02/03/2020	Original issue date: 02/03/2020 Original NGCTS report: NGC 5020013

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Report Number: NGC 5020013

Page 3 of 5

Test Method: This test method conforms explicitly with the American Society for Testing and Materials Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements – Designation: E 90 – 09 (2016) / E 413 - 16.

Specimen Description: 6 inch concrete slab floor ceiling assembly overlaid with, according to client, Step & Wall Natural Superior Oak Flooring.

The test specimen was a floor assembly and was observed to consist of the following:
All weights and dimension are averaged:

- 1 layer of, according to the client, Step & Wall Natural Superior Oak Flooring. The flooring was floating on the concrete slab. Measured average thickness: 11.68 mm (0.46 in.). Measured average weight: 8.97 kg/m² (1.84 PSF)
- 152.4 mm (6 in.) thick reinforced concrete slab, weighing: 366.2 kg/m² (75.00 PSF)
- 1 layer of, 88.9 mm (3-1/2 in.) unfaced fiberglass batt insulation which was laid over the suspended grid system parallel to the main tees. Sample weight: 0.78 kg/m² (0.16 PSF)
- Gypsum wallboard ceiling grid suspension system. System is comprised of main tees and cross tees. The main tees were placed 1219.2 mm (48 in.) o.c. and the cross tees were placed 609.6 mm (24 in.) o.c. 16 gauge galvanized tie wire was used to attach the main tees to concrete anchors, located 1219.2 mm (48 in.) o.c. along the longitudinal axis, suspending the grid 304.8 mm (12 in.) below the concrete slab.
- 1 layer of, 15.9 mm (5/8 in.) Type X gypsum wallboard. The wallboard was attached parallel to the suspended grid suspension system mains, using 28.6 mm (1-1/8 in.) Type S drywall screws spaced 304.8 mm (12 in.) o.c. The wallboard joints were taped. Suspended gypsum wallboard grid ceiling weighed: 11.23 kg/m² (2.30 PSF)

The overall weight of the test assembly is: 387.14 kg/m² (79.30 PSF)

The perimeter of the test frame was sealed with a rubber gasket and a sand filled trough.

The test frame was structurally isolated from the receiving room.

Specimen size: 3657.6 mm x 4876.8 mm (12 ft. x 16 ft.)

Conditioning: Concrete slab cured for a minimum of 28 days.

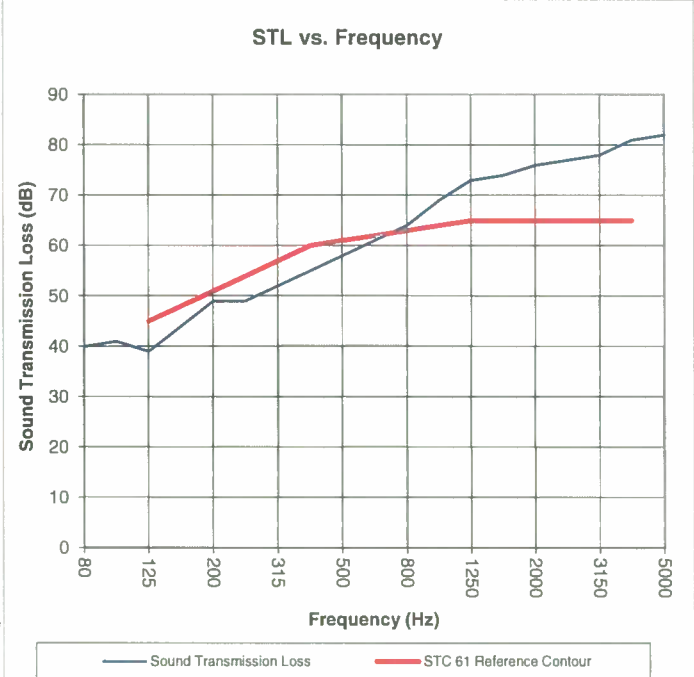
Test Results: The results of the tests are given on pages 4 and 5 of the report.

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. This report may not be reproduced except in full, without written approval of the laboratory.

Sound Transmission Loss Test Data							
Test: ASTM E 90 - 09 (2016) / ASTM E 413 - 16							
Test Report: NGC 5020013						Date: 1/17/2020	
Specimen Size [m²]: 17.8						Page 4 of 5	
Source room				Receiving room			
Volume [m³]: 86				Volume [m³]: 124			
Rm Temp [°C]: 25				Rm Temp [°C]: 22			
Humidity [%]: 50				Humidity [%]: 53			
Sound Transmission Class STC [dB]: 61							
Sum of Unfavorable Deviations [dB]: 31							
Max. Unfavorable Deviation [dB]: 6				at 125 Hz			
Frequency	STL	L1	L2	d	Corr.	u.Dev.	ΔSTL
[Hz]	[dB]	[dB]	[dB]	[dB/s]	[dB]	[dB]	
80	40	101.2	64.1	30.5	2.9		2.39
100	41	103.5	65.9	23.7	3.4		3.65
125	39	103.5	69.5	18.7	5.0	6	2.02
160	44	105.6	66.0	17.6	4.4	4	1.45
200	49	106.8	63.0	15.7	5.1	2	1.15
250	49	102.7	58.8	16.5	5.1	5	1.02
315	52	101.3	54.9	14.9	5.7	5	0.89
400	55	99.9	50.2	16.2	5.2	5	0.98
500	58	100.6	47.1	17.1	4.5	3	0.60
630	61	100.9	44.9	17.8	5.0	1	0.73
800	64	100.8	41.0	18.5	4.2		0.54
1000	69	98.8	34.3	18.0	4.6		0.62
1250	73	95.6	27.2	18.9	4.5		0.79
1600	74	97.4	27.3	20.9	3.8		0.40
2000	76	98.7	25.8	23.9	3.1		1.18
2500	77	100.3	26.1	26.2	2.8		1.13
3150	78	99.6	24.1	27.7	2.4		1.19
4000	81	97.0	18.3	31.1	2.3		1.76
5000	82	91.0	10.7	34.9	1.7		2.06

STL = Sound Transmission Loss, dB
 L1 = Source Room Level, dB
 L2 = Receiving Room Level, dB
 d = Decay Rate dB/second
 Δ STL = Uncertainty for 95% Confidence Level

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agent of the U.S. Government. This report may not be reproduced except in full, without written approval of the laboratory.

Sound Transmission Loss Test Data			Page 5 of 5																																																												
Test: ASTM E 90 - 09 (2016) / ASTM E 413 - 16																																																															
Test Report: NGC 5020013 Test Date: 1/17/2020 Specimen Size [m ²]: 17.8																																																															
Sound Transmission Class STC = 61 dB																																																															
																																																															
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency [Hz]</th> <th>STL [dB]</th> <th>ΔSTL</th> </tr> </thead> <tbody> <tr><td>80</td><td>40</td><td>2.39</td></tr> <tr><td>100</td><td>41</td><td>3.65</td></tr> <tr><td>125</td><td>39</td><td>2.02</td></tr> <tr><td>160</td><td>44</td><td>1.45</td></tr> <tr><td>200</td><td>49</td><td>1.15</td></tr> <tr><td>250</td><td>49</td><td>1.02</td></tr> <tr><td>315</td><td>52</td><td>0.89</td></tr> <tr><td>400</td><td>55</td><td>0.98</td></tr> <tr><td>500</td><td>58</td><td>0.60</td></tr> <tr><td>630</td><td>61</td><td>0.73</td></tr> <tr><td>800</td><td>64</td><td>0.54</td></tr> <tr><td>1000</td><td>69</td><td>0.62</td></tr> <tr><td>1250</td><td>73</td><td>0.79</td></tr> <tr><td>1600</td><td>74</td><td>0.40</td></tr> <tr><td>2000</td><td>76</td><td>1.18</td></tr> <tr><td>2500</td><td>77</td><td>1.13</td></tr> <tr><td>3150</td><td>78</td><td>1.19</td></tr> <tr><td>4000</td><td>81</td><td>1.76</td></tr> <tr><td>5000</td><td>82</td><td>2.06</td></tr> </tbody> </table>			Frequency [Hz]	STL [dB]	ΔSTL	80	40	2.39	100	41	3.65	125	39	2.02	160	44	1.45	200	49	1.15	250	49	1.02	315	52	0.89	400	55	0.98	500	58	0.60	630	61	0.73	800	64	0.54	1000	69	0.62	1250	73	0.79	1600	74	0.40	2000	76	1.18	2500	77	1.13	3150	78	1.19	4000	81	1.76	5000	82	2.06
Frequency [Hz]	STL [dB]	ΔSTL																																																													
80	40	2.39																																																													
100	41	3.65																																																													
125	39	2.02																																																													
160	44	1.45																																																													
200	49	1.15																																																													
250	49	1.02																																																													
315	52	0.89																																																													
400	55	0.98																																																													
500	58	0.60																																																													
630	61	0.73																																																													
800	64	0.54																																																													
1000	69	0.62																																																													
1250	73	0.79																																																													
1600	74	0.40																																																													
2000	76	1.18																																																													
2500	77	1.13																																																													
3150	78	1.19																																																													
4000	81	1.76																																																													
5000	82	2.06																																																													
<p>* Due to high insulating value of specimen, background levels limit results at these frequencies.</p> <p style="text-align: center;"> STL = Sound Transmission Loss, dB Δ STL = Uncertainty for 95% Confidence Level </p>																																																															

The results reported above apply to specific samples submitted for measurement. No responsibility is assumed for performance of any other specimen. The laboratory's accreditation or any of its test reports in no way constitute or imply product certification, approval, or endorsement by NVLAP, NIST or any agent of the U.S. Government. This report may not be reproduced except in full, without written approval of the laboratory.